

Power Flat Alloy Resistors

Performance Specification





Temperature Coefficient	±350PPM/°C
Short Time Overload	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Dielectric Withstanding Voltage	2,000V
Terminal Strength	No evidence of mechanical damage.
Resistance to Soldering Heat	±(1.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Solderability	Min. 95% coverage
Temperature Cycling	±(5% + 0.05Ω)Max, with no evidence of mechanical damage.
Humidity (Steady State)	±(5% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life in Humidity	±(5% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life	±(5% + 0.05Ω)Max, with no evidence of mechanical damage.

Ordering Procedure: Ex.: PFAS 5W, +/- 5%, 0.68Ω, B/B

P	F	A	S	5	W	J	0	6	8	K	B	0	0	
Type: PFAS = PFA Single PFAT = PFA Twin				Wattage: 2W = 2W 3W = 3W 5W = 5W 7W = 7W AW = 10W		Resistance Value: • E-24 series: 1 st digit is "0" 2 nd & 3 rd digits are the significant figures of the resistance 4 th indicates the number of zeros: "J" ~ 0.1, "K" ~ 0.01 Ex.: 4.7Ω ~ 47J			Tolerance: J = ±5% K = ±10% M = ±20%		Packing Type: B = Bulk/Box		Packing Qty: 0 = Bulk/Box	
											Additional Information: 0 = Standard			

Features

- Low Inductance
- Safety flameproof construction
- Thin & lightweight save PCB space
- Automatically insertable
- Application: TV, Microwave, Audio, Air condition

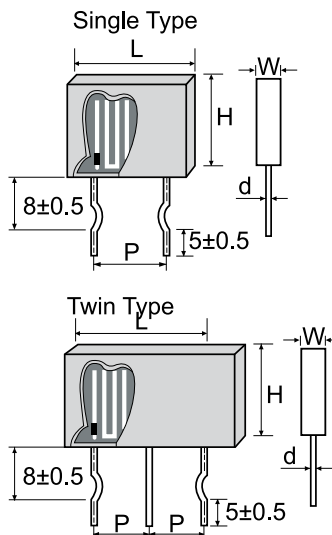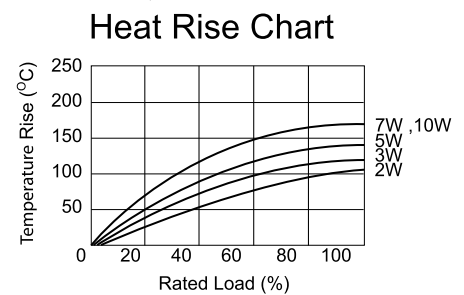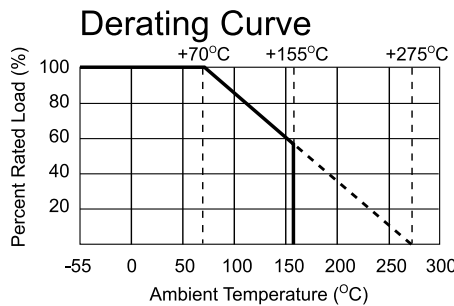

Part No.	Style	Power Rating at 70°C	Dimension (mm)					Resistance Range (±5% & ±10%)
			W ⁺⁰ _{-0.5}	H±1	L±1	d±0.05	P±1	
PFAS Type (Single Circuit)								
PFAS2W	PFAS 2W	2W	5.5	9	14	0.75	10	0.1Ω ~ 0.68Ω
PFAS3W	PFAS 3W	3W	5.5	13	14	0.75	10	0.1Ω ~ 0.68Ω
PFAS5W	PFAS 5W	5W	5.5	18	14	0.75	10	0.1Ω ~ 1Ω
PFASAW	PFAS 10W	10W	5.5	18	26	0.75	20	0.22Ω ~ 3.3Ω
PFAT Type (Twin Circuit)								
PFAT2W	PFAT 2W + 2W	2W	5.5	9	26	0.75	10	0.1Ω ~ 0.68Ω
PFAT3W	PFAT 3W + 3W	3W	5.5	13	26	0.75	10	0.1Ω ~ 0.68Ω
PFAT5W	PFAT 5W + 5W	5W	5.5	18	26	0.75	10	0.1Ω ~ 1Ω
PFAT7W	PFAT 7W + 7W	7W	5.5	20	26	0.75	10	0.1Ω ~ 1Ω